




**WHERE  
PRECISION  
DRIVES  
PRODUCTION**

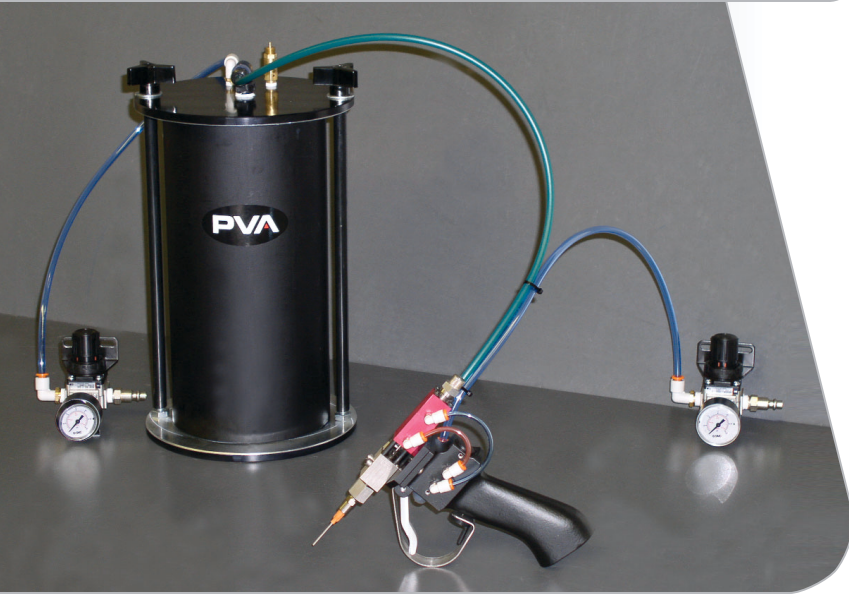

## SYSTEM SPECIFICATIONS

### WETTED COMPONENTS:

#### Valve

- Stainless Steel
- Teflon®
- Viton®

#### Tank

- Drop in Bottle

#### Material Line

- UV Safe Teflon®

### MAXIMUM MATERIAL PRESSURE:

70 PSI

### TANK VOLUME:

1 Liter Bottle Maximum

### DISPENSE MODE:

Manual

### VALVE TIP:

Luer-Lok™ Adapter

### OPERATING AIR PRESSURE:

80 PSI - 100 PSI

### SUPPLY VOLTAGE:

None

## FC100-1LT-H


### Description of System Operation:

1. Bottle of material is placed in pressure pot.
2. Air pressure is applied to valve handle.
3. Air pressure is applied to material.
4. Trigger on handle is depressed to begin dispense.
5. Fluid pressure is adjusted to control flow.
6. Stroke adjuster on the valve can be adjusted for flow rate.

For more information on PVA's dispensing capabilities, please contact one of our sales representatives at (518) 371-2684.

PVA also offers optional accessories for this system.

- ▲ Solvent stand to hold valve handle
- ▲ FC1-SP, valve spare parts kit
- ▲ B62-0766-SP, system spare parts kit

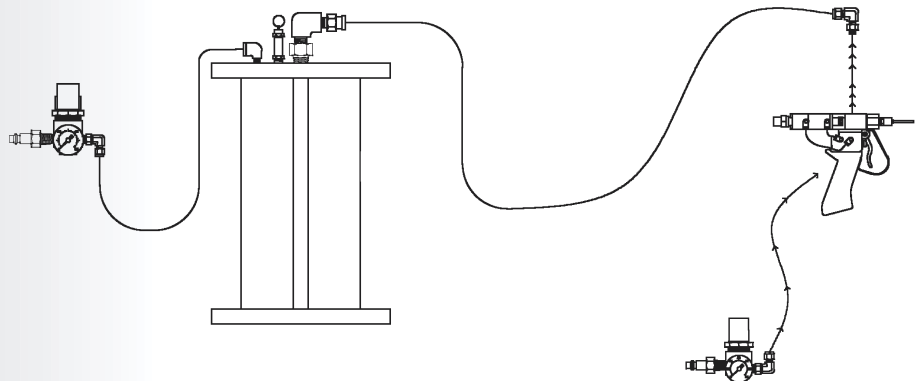

15 Solar Drive  
Halfmoon NY 12065  
**tel** 518 371 2684  
**fx** 518 371 2688  
info@pva.net

Luer-Lok™ is a Becton Dickinson and Co. trademark.  
Viton® and Teflon® are registered trademarks of DuPont.